


Single-phase energy meter

with LC display, electronic

Energy meter with LCD display and integrated S0 interface. The S0 interface is a hardware interface for the transmission of measured values in building automation.

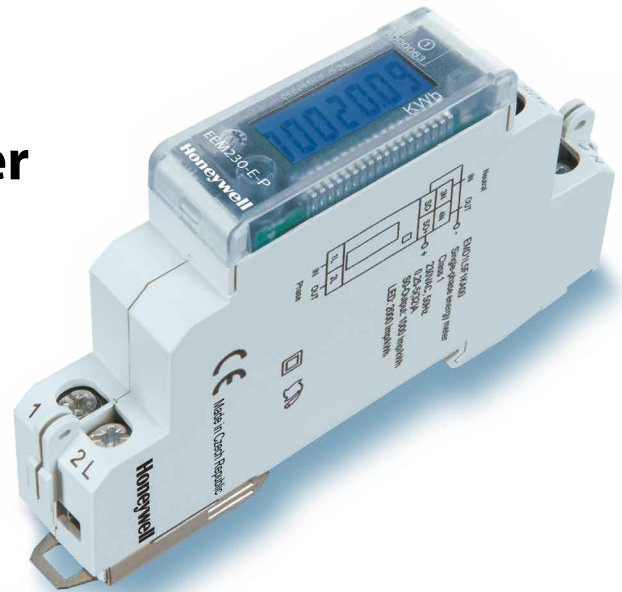

Main features

- ▶ Single-phase energy meter, 230 VAC 50 Hz
- ▶ Direct measurement up to 32 A
- ▶ 7-digit LC-Display
- ▶ Lead seal possible with cap as accessory
- ▶ Precision class 1 according to IEC62053-21
- ▶ S0 output according to IEC62053-31

Technical data

Precision class	Class 1 according to IEC62053-21
Operating voltage	230 VAC, 50 Hz, Tolerance -20% / +15%
Reference/measurement current	I _{ref} = 5 A, I _{max} = 32 A
Starting/minimum current	I _{st} = 20 mA, I _{min} = 0.25 A
Power consumption	Active 0.4 W
Measurement	Direct
Counting range	00'000.00...99'999.99 100'000.0...999'999.9
Display	LCD, digits 5 mm high
S0 output	Optocoupler max. 30 V/20 mA and at least 5 V, impedance 100 Ω, impulse range 30 ms
Transmission distance	Maximum 1000 m (with 30 V/20 mA)
Pulses per kWh	LED: 2'000 Imp./kWh
Standard Version	S0 output: 1000 pulses/kWh

Mounting

Mounting	On 35 mm rail, according to EN60715TH35
Screwdrivers	- Primary circuit: Pozidrive no. 1, slotted head no. 1, Tightening torque: 1,2 Nm - S0 output: Pozidrive no. 0, slotted head no. 1, Tightening torque: 0,5 Nm
Primary circuit connections	Max. 6 mm ² , M4
S0 impulse outputs	Max. 2.5 mm ² , M3
Insulation characteristics	- 4 kV / 50 Hz test according to IEC62053-21 for Energy Meter part - 6 kV 1.2/50 μs surge voltage according to IEC62052-11 - Equipment class II
Ambient temperature	-10°...+55 °C
Storage temperature	-30°...+85 °C
Relative humidity	95% at 25°...+40 °C, without condensation
EMC/interference immunity	- Surge voltage in accordance with IEC61000-4-5 on primary circuit, 4 kV - Surge voltage in accordance with IEC61000-4-5 at S0 impulse outputs, 1 kV - Burst voltage in accordance with IEC61000-4-4, 4 kV - ESD in accordance with IEC61000-4-2, contact 8 kV, air 15 kV



Applications

For precise power management and individual invoicing at jointly used facilities


- ▶ Precise and secure invoicing of power consumption on camping sites, in marinas, at exhibitions and on street markets
- ▶ Measurement of renewable power in the private area, e.g. photovoltaics
- ▶ Measurement of power consumption for advertising and lighting

Dimension diagram


Structure

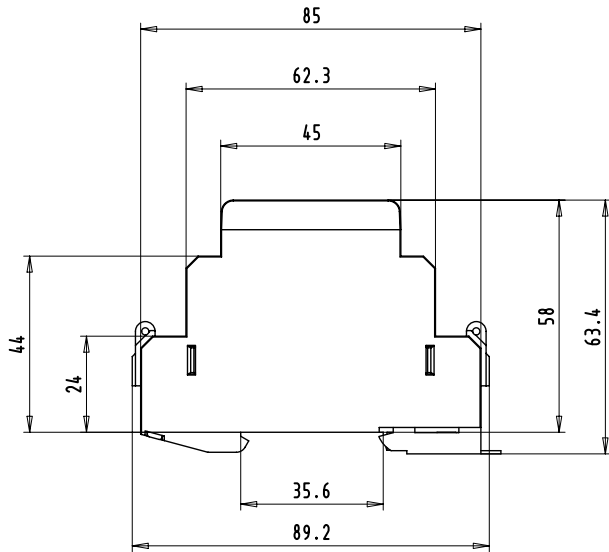

Display elements, direct measurement

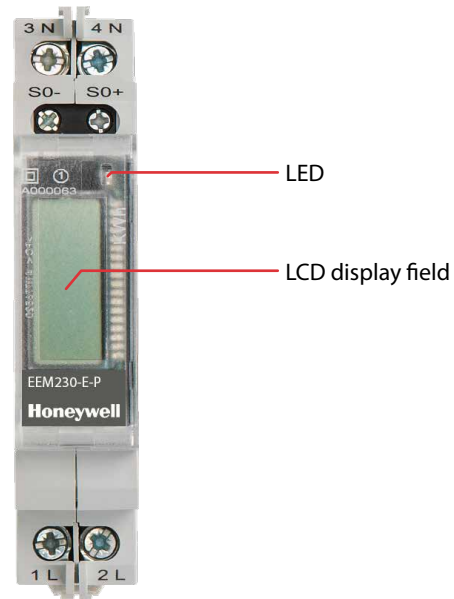

Connection diagram

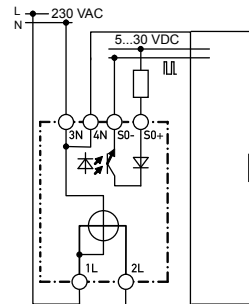

Order indication

Type	Description
EEM230-E-P	Single-phase energy meter with LC display, electronic
EEM230-Sealcap	Lead sealing cover (2 units recommended as protection against accidental contact)

Honeywell

Manufactured for and on behalf of the Environmental and Combustion Controls Division of Honeywell Technologies Sàrl, Rolle, Z.A. La Pièce 16, Switzerland by its authorized Representative:

Saia-Burgess Controls AG

Bahnhofstrasse 18 | 3280 Murten, Switzerland
 T +41 26 580 30 00 | F +41 26 580 34 99
 www.saia-pcd.com

support@saia-pcd.com | www.sbc-support.com